


SAMSUNG LFD MONITORS

UX/UXn/UTn Series

Utilizes an ultra-thin bezel for virtually seamless video walls.
Its DID panel enables higher brightness and longer operation.

400UX(n)/400UX(n)-M/460UX(n)/460UT(n)/460UT(n)-M

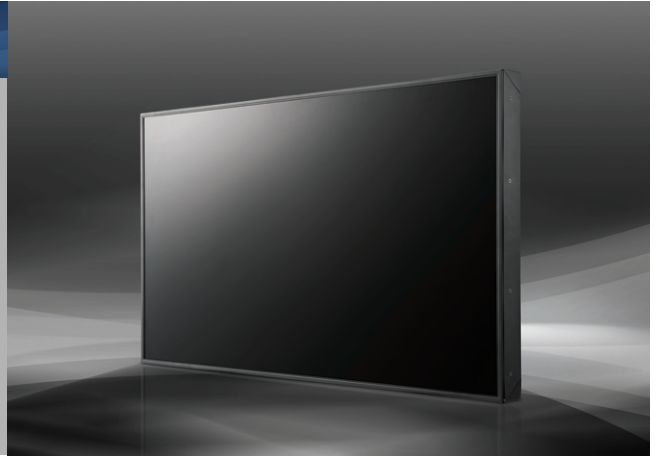

Features

- DID Technology
- Dynamic Contrast Ratio
- Narrow Front Frame Design
- Samsung ID™ Video Wall (Option)
- Built in Computer (Option)
- MagicInfo™ Compatible

Specification

		400UX(n)	460UX(n)	460UT(n)
Panel	Diagonal Size	40"	46"	46"
	Resolution	1366 x 768	1366 x 768	1366 x 768
	Brightness (Typ.)	700cd/m ²	700cd/m ²	700cd/m ²
	Contrast Ratio (DCR)	2,000:1	2,000:1	3000:1
	Dynamic C/R	5,000:1	5,000:1	40,000:1
	Viewing Angle (H/V)	178/178	178/178	178/178
Connectivity	PC Inputs	VGA/DVI/BNC (Support SOG)	VGA/DVI/BNC (Support SOG)	VGA/DVI (Support SOG)
	Video Inputs	CVBS/S-Video/Component/HDMI	CVBS/S-Video/Component/HDMI	CVBS/HDMI
	Network	O (MagicInfo Pro)*	O (MagicInfo Pro)*	O (MagicInfo Pro)*
	Speaker	X	X	X
Power	Power Consumption (Max)	220W/280W*	270W/340W*	260W/330W*
	Power Consumption at Stand-by (Max)	UX: 1W UXn: 5W	UX: 1W UXn: 5W	UT: 2W UTn: 5W
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Mechanical	Weight (Set/Package)	UX: 21.2/25.2 UXn: 22.5/26.5	UX: 27.7/32.2 UXn: 29.0/33.5	UT: 28.6/36.4 UTn: 30.0/38.0
	Dimension (W/O Stand)	UX: 914 x 526 x 118 UXn: 914 x 526 x 118	UX: 1049 x 603 x 118 UXn: 1049 x 603 x 118	UT: 1025.6 x 579.8 x 130 .0 UTn: 1025.6 x 579.8 x 130 .0
Operation	Operating Temperature	0°C ~ 40°C/10°C ~ 40°C*	0°C ~ 40°C/10°C ~ 40°C*	10°C ~ 40°C
	Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%
Feature	Special Features	- Built in Network* - MagicInfo S/W* - Lamp Error Detection - Temperature Sensor - Built in Fan - IR In/Out - RS232C	- Built in Network* - MagicInfo S/W* - Lamp Error Detection - Temperature Sensor - Built in Fan - IR In/Out - RS232C	- Built in Network* - MagicInfo S/W* - Lamp Error Detection - Temperature Sensor - Built in Fan - IR In/Out - RS232C
Network*	Operating System	Window XP Embedded	Window XP Embedded	Window XP Embedded
	CPU	Athlon X2 Dual-Core	Athlon X2 Dual-Core	Athlon X2 Dual-Core
	FDM	4GB	4GB	4GB
	Memory	SEC DDR2 1GB	SEC DDR2 1GB	SEC DDR2 1GB
	USB	3 USB	3 USB	3 USB
Accessory	Wall Mount	-	WMN-5770D	WMN-5770D
	Vertical Mount	-	WMN-5770D	WMN-5770D
	Ceiling Mount	CML500D	CML500D	CML500D

* Apply to Network Model Only

* Design and Specifications are subject to change without notice.